


Specifications

Model				SVL65-2	
Type of operator station				Open CAB / Closed CAB	
Engine	Model			V2607-CR-TE4	
	Output (SAE J1995 gross)		HP (kW)/rpm	68.3 (51.0) / 2600	
	Output (SAE J1349 net)		HP (kW)/rpm	60 (44.7) / 2600	
	Displacement		cu.in. (cc)	159.6 (2615)	
	Cylinders			4	
	Bore × Stroke		in. (mm)	3.4 (87) × 4.3 (110)	
	Aspiration			Turbocharged	
Loader Performance	Rated operating capacity-35% tipping load		lbs. (kg)	2100 (953)	
	Tipping load		lbs. (kg)	6000 (2722)	
	Breakout force	Bucket	lbf. (kg)	4614 (2093)	
		Lift arm	lbf. (kg)	4266 (1935)	
	Lift arm path			Vertical	
Undercarriage	Track Width	Standard	in. (mm)	12.6 (320)	
		Wide	in. (mm)	15.0 (380)	
	Ground pressure	Standard	psi	5.0	
		Wide	psi	4.2	
	Track rollers (per side)			4	
	Track ground contact length		in. (mm)	57.9 (1470)	
	Travel speed	Low	mph (km/h)	4.9 (7.8)	
		High	mph (km/h)	7.1 (11.5)	
	Traction force		lbf. (kgf)	8406 (3813)	
Min. ground clearance		in. (mm)	9.1 (233)		
Hydraulic system	Aux. hydraulic flow	Std./High Flow	gpm (ℓ/min.)	17.4 (65.8) / 27.0 (102.2)	
	Aux. hydraulic pressure		psi (kgf/cm²)	3263 (229.4)	
Service refill capacities	Hydraulic system		gal. (ℓ)	13.2 (50)	
	Hydraulic tank		gal. (ℓ)	5.4 (20.3)	
	Fuel tank		gal. (ℓ)	21.7 (82)	
Operating weight (Includes operator weight 165lbs.)			lbs. (kg)	8035 (3645) / 8465 (3840)	

The company reserves the right to change the above specifications without notice. This brochure is for descriptive purposes only. Please contact your local Kubota dealer

Dimensions

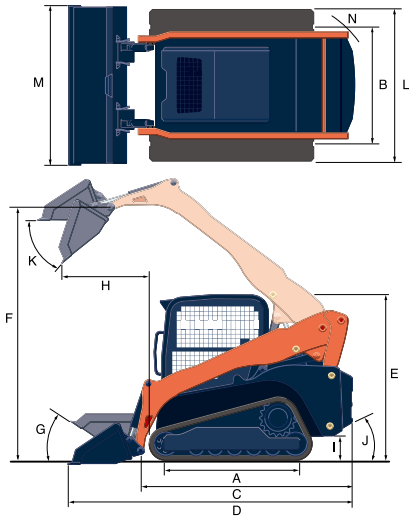

Model			SVL65-2	
A	Length of track on ground	in. (mm)	57.9 (1470)	
B	Track gauge	in. (mm)	52.6 (1337)	
C	Length w/o bucket	in. (mm)	107.3 (2725)	
D	Length w/bucket on ground	in. (mm)	136.4 (3465)	
E	Height to top of cab	in. (mm)	79.9 (2029)	
F	Bucket hinge pin height at max. lift	in. (mm)	118.5 (3010)	
G	Rollback angle at carry position	degree	30	
H	Reach at max. lift and dump	in. (mm)	34.9 (886)	
I	Ground clearance	in. (mm)	9.1 (233)	
J	Departure angle	degree	30	
K	Max. dump angle	degree	40	
L	Vehicle width Standard track / Wide track	in. (mm)	65.2 (1657) / 67.6 (1717)	
M	Width with bucket	in. (mm)	68 (1727) / 74 (1880)	
N	Turning radius from center-machine rear	in. (mm)	57.1 (1451)	

Kubota Tractor Corporation reserves the right to change the stated specifications without notice. This brochure is for descriptive purposes only and reasonable efforts were used to set forth the contained information; some items shown may be optional and some products shown may not be available at all dealerships. Kubota disclaims all representations and warranties, express or implied, or any liability from the use of this brochure. For complete warranty, safety and product information, consult your local Kubota dealer and the operator's manual. Power (HP/KW) and other specifications are based on various standards or recommended practices. For your safety, Kubota strongly recommends the use of a Rollover Protective Structure (ROPS) and seat belt in almost all applications. This brochure is intended for the United States and US territories only. For information regarding Kubota products or services outside these areas, see Kubota Corporation's global web site. Kubota does not provide parts, warranty or service for any Product which is re-sold or retailed in any country other than the country for which the Product(s) were designed or manufactured.



KUBOTA TRACTOR CORPORATION

1000 Kubota Drive, Grapevine, TX 76051 Tel 888-4 KUBOTA

Visit our web site at: www.kubotausa.com

©2018 Kubota Corporation




**Kubota
Genuine Parts**
for maximum
performance,
durability and
safety



SPECIFICATIONS

Model				SVL75-2	SVL95-2s
Type of operator station				Open CAB / Closed CAB	Open CAB / Closed CAB
Engine	Model			V3307-CR-TE4	V3800-TIEF4
	Emission certification			Tier 4	Tier 4
	Gross HP (SAE J1995)		HP (kW)/rpm	74.3 (55.4)/2400	96.4 (71.9)/ 2400
	Net HP (SAE J1349)		HP (kW)/rpm	68.8 (51.3)/2400	87.0 (64.9)/ 2400
	Displacement		cu.in. (cc)	203.3 (3331)	230.0 (3769)
	Cylinders			4	4
	Bore × Stroke		in.(mm)	3.7 (94) × 4.72 (120)	3.94 (100) × 4.72 (120)
	Aspiration			Turbocharged	Turbocharged
Loader Performance	Rated operating capacity-35% tipping load		lbs. (kg)	2300 (1043)	3200 (1451)
	Tipping load		lbs. (kg)	6570 (2980)	9143 (4147)
	Breakout force	Bucket	lbf. (kg)	6204 (2814)	7961 (3611)
		Lift arm	lbf. (kg)	4766 (2162)	6742 (3058)
	Lift arm path			Vertical	Vertical
Undercarriage	Track Width	Standard	in. (mm)	12.6 (320)	17.7 (450)
		Wide	in. (mm)	15.0 (380)	N/A
	Ground pressure	Standard	psi	5.6 / 5.8	4.4 / 4.5
		Wide	psi	4.7 / 4.9	N/A
	Track rollers (per side)			4	5
	Track ground contact length		in. (mm)	56.5 (1436)	65.6 (1667)
	Travel speed	Low	mph (km/h)	4.7 (7.5)	5.0 (8.0)
		High	mph (km/h)	7.1 (11.5)	7.3 (11.7)
	Traction force		lbs. (kg)	9678 (4390)	12178 (5524)
Min. ground clearance		in. (mm)	11.7 (296)	11.5 (293)	
Hydraulic system	Aux. hydraulic flow	Std./High	gpm (ℓ/min.)	17.4 (66.0) / 29.3 (110.9)	23.1 (87.6) / 40.0 (152)
	Aux. hydraulic pressure		psi (kgf/cm²)	3185 (224.0)	3553 (249.8)
Service refill capacities	Hydraulic system		gal. (ℓ)	15.9 (60)	17.96 (68)
	Hydraulic tank		gal. (ℓ)	9.2 (35)	10.1 (38.1)
	Fuel tank		gal. (ℓ)	24.6 (93)	28.8 (109)
	DEF tank		gal. (ℓ)	N/A	5.0 (18.8)
Operating weight (Includes operator weight 165lbs.)			lbs. (kg)	9039 (4100) / 9315 (4225)	11299 (5125) / 11574 (5250)

DIMENSIONS

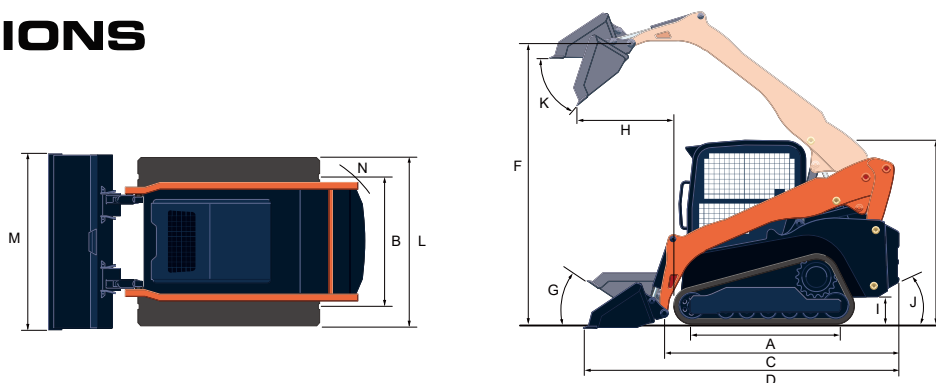

Model				SVL75-2	SVL95-2s
A	Length of track on ground	in. (mm)		56.5 (1436)	65.6 (1667)
B	Track gauge	in. (mm)		53.3 (1355)	59.5 (1512)
C	Length w/o bucket	in. (mm)		109 (2768)	123.5 (3137)
D	Length w/bucket on ground	in. (mm)		140.8 (3576)	154.6 (3929)
E	Height to top of cab	in. (mm)		82 (2083)	83.3 (2116)
F	Bucket hinge pin height at max. lift	in. (mm)		119.1 (3025)	128.5 (3264)
G	Rollback angle at carry position	degree		27	27
H	Reach at max. lift and dump	in. (mm)		41.7 (1060)	40.7 (1035)
I	Ground clearance	in. (mm)		11.7 (296)	11.5 (293)
J	Departure angle	degree		31.5	31
K	Max. dump angle	degree		40	43
L	Vehicle width	Standard track / Wide track	in. (mm)	65.9 (1675) / 68.3 (1735)	77.2 (1962)
M	Width with bucket		in. (mm)	68 (1727)	80 (2032)
N	Turning radius from center-machine rear		in. (mm)	107.1 (2720)	127 (3220)